

Brava

Linear, Batten



Corrosion Resistant



A range of durable, IP65 corrosion resistant battens. They are suitable for use in a wide variety of industrial and amenity applications, such as factories, warehouses and many exterior sheltered areas.

Clear diffuser

Single and twin versions available

A wide range of wattages available

Suitable for ceiling/surface mounting

50,000 hours life

HILCLARE

LIGHTING MANUFACTURER

— LED BY DESIGN —

T: 0161 274 3626

F: 0161 274 3731

E: sales@hilclare.com

Ordering information


(Luminaires supplied c/w clear prismatic diffuser)

| | Code | Weight (kg) | Total Watts | Total Lumens | Luminaire Efficacy | Dim A (mm) | Dim B (mm) | IP Rating | Life | Warranty |
|-----|-------------|-------------|-------------|--------------|--------------------|------------|------------|-----------|----------|----------|
| 19W | CRB1914T440 | 2.45 | 19 | 2501 | 128 | 104 | 1266 | IP65 | 50,000hr | 5 year |
| 27W | CRB2714T440 | 2.45 | 27 | 3868 | 136 | 104 | 1266 | IP65 | 50,000hr | 5 year |
| 34W | CRB3414T440 | 4.25 | 34 | 4648 | 131 | 104 | 1266 | IP65 | 50,000hr | 5 year |
| 37W | CRB3724T440 | 4.25 | 37 | 4809 | 124 | 165 | 1266 | IP65 | 50,000hr | 5 year |
| 54W | CRB5424T440 | 4.25 | 54 | 7438 | 130 | 165 | 1266 | IP65 | 50,000hr | 5 year |
| 68W | CRB6824T440 | 4.25 | 68 | 9297 | 131 | 165 | 1266 | IP65 | 50,000hr | 5 year |
| 23W | CRB2315T440 | 3.49 | 23 | 3126 | 129 | 104 | 1566 | IP65 | 50,000hr | 5 year |
| 34W | CRB3415T440 | 3.49 | 34 | 4836 | 135 | 104 | 1566 | IP65 | 50,000hr | 5 year |
| 38W | CRB3815T440 | 3.49 | 38 | 5436 | 137 | 104 | 1566 | IP65 | 50,000hr | 5 year |
| 46W | CRB4625T440 | 6.55 | 46 | 6011 | 124 | 165 | 1566 | IP65 | 50,000hr | 5 year |
| 68W | CRB6825T440 | 6.55 | 68 | 9297 | 130 | 165 | 1566 | IP65 | 50,000hr | 5 year |
| 84W | CRB8425T440 | 6.55 | 84 | 11621 | 131 | 165 | 1566 | IP65 | 50,000hr | 5 year |


Code Builder

Opal diffuser – Add OP
 Emergency – Add EM
 Self-test emergency – Add STEM
 Dali/switch dimming – Add DA
 Microwave – Add MS9
 Microwave corridor version – Add MS9MD
 Batten PIR sensor – Add MB

Dimensions



Photometrics

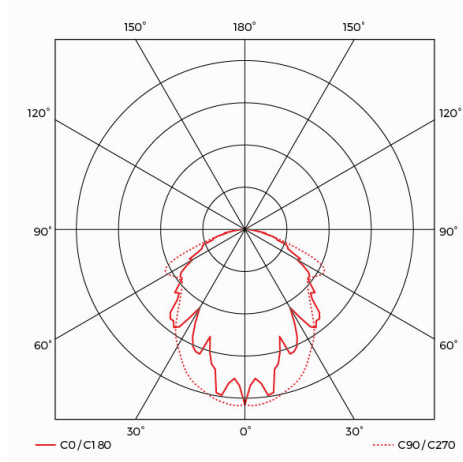

Classification of Protection

Against electric shock Class I protected with earthed metalwork. Against ingress of dust and moisture IP65 Technical Specification.

Operations

Designed for operation in an interior environment. IP Rating is only valid when luminaires are horizontally ceiling mounted, diffuser downwards. Ambient temperature range: 0°C to +25°C. 230V 50Hz nominal input voltage.

Standards

The Brava range of luminaires is designed and manufactured to meet the requirements of BSEN 60598 2-1.

Specification

A range of durable, IP65 corrosion resistant battens. They are suitable for use in a wide variety of industrial and amenity applications, such as factories, warehouses and many exterior sheltered areas.