

# Como

## Surface Mounted IP54, Bulkhead



A versatile and attractive range of circular surface/semi-recessed luminaires with a snap fit diffuser. Suitable for interior locations. White base, opal diffuser.

Integral and self-test emergency versions available

Semi-recessing kit available

Microwave presence detection options available

Night light facility option

50,000 hours life

# HILCLARE

LIGHTING MANUFACTURER

— LED BY DESIGN —

T: 0161 274 3626

F: 0161 274 3731

E: [sales@hilclare.com](mailto:sales@hilclare.com)


## Ordering Information

	Code	Weight (kg)	Total Watts	Total Lumens	Luminaire Efficacy	IP Rating	Life	Warranty
13W	DLC13T440	2.3	13	1064	80	IP54	50,000hr	5 year
19W	DLC19T440	2.3	19	1556	79	IP54	50,000hr	5 year

## Code Builder

Emergency – Add EM  
 Microwave – Add MS9  
 Dali dimming – Add DA  
 Night light – Add NL  
 Self-test emergency – Add STEM  
 Colour 3000K – Add 30  
 Semi-recessing kit available  
 Chrome rim available

## Dimensions

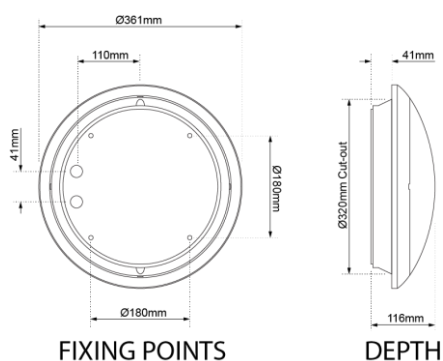

## Classification of Protection

Against electric shock Class 1 protected with earthed metalwork. Against ingress of dust and moisture IP54 Technical Specification.


## Standards

The Como range of luminaires is designed and manufactured to meet the requirements of BSEN 60598 2-1.

## Operations

Designed for operation in an interior or exterior covered environment.  
 Ambient temperature range:  
 0°C to +25°C.  
 230V 50Hz nominal input voltage.

## Photometrics

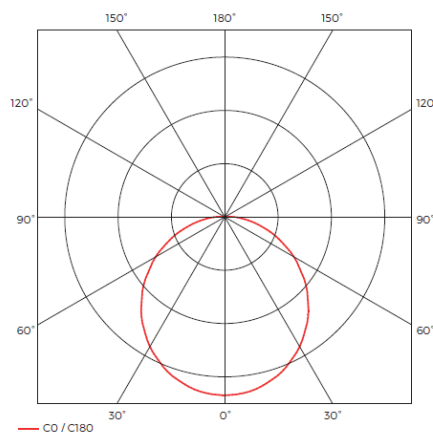

## Specification

A versatile and attractive range of circular surface/semi-recessed luminaires with a snap fit diffuser. Suitable for interior locations. White base, opal diffuser.