

Lindoso

Surface Mounted, Bulkhead (Decorative)



A distinctive and attractive slimline luminaire with slotted side panels which give a subtle horizontal back light. Fabricated from white dry powder coated mild steel base/diffuser frame and opal polycarbonate diffuser secured by decorative chrome bolts. Suitable for hotels, offices, corridors and stairwells.

White dry powder coated mild steel base/diffuser frame

Opal polycarbonate diffuser

Secured by decorative chrome bolts

Slotted side panels in the base give a back light to the side of the luminaire

50,000 hours life

HILCLARE

LIGHTING MANUFACTURER

— LED BY DESIGN —

T: 0161 274 3626

F: 0161 274 3731

E: sales@hilclare.com


Ordering Information

	Code	Weight (kg)	Total Watts	Total Lumens	Luminaire Efficacy	IP Rating	Life	Warranty
24W	SDL24T5LED40	2.9	24	2814	110	IP20	50,000hr	5 year


Code Builder

Microwave sensor – Add MS9
 Microwave corridor version – Add MS9MD
 Emergency – Add EM
 Colour 3000K – Add 30
 Dali dimming – Add DA

Dimensions

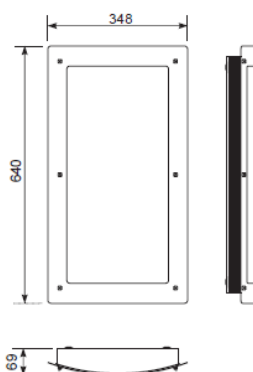

Photometrics

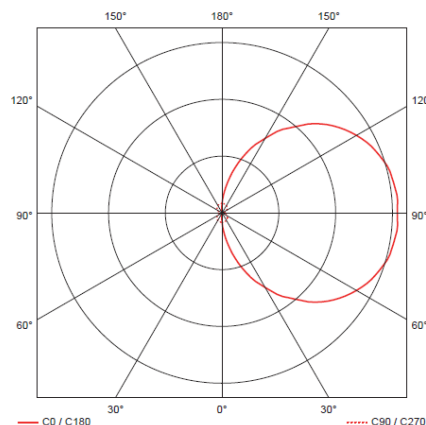

Classification of Protection

Against electric shock Class 1 protected with earthed metalwork. Against ingress of dust and moisture IP20 Technical Specification.

Standards

The Lindoso range of luminaires is designed and manufactured to meet the requirements of BSEN 60598 2-1

Operations

Designed for operation in an interior environment.
 Ambient temperature range:
 0° to +25°C.
 230V 50Hz nominal input voltage.

Specification

A distinctive and attractive slimline luminaire with slotted side panels which give a subtle horizontal back light. Fabricated from white dry powder coated mild steel base/ diffuser frame and opal polycarbonate diffuser secured by decorative chrome bolts. Suitable for hotels, offices, corridors and stairwells.