

NEW

HILCLARE

LIGHTING MANUFACTURER

— LED BY DESIGN —

MXE-25/30

Fixed and Suspend Exit Blade



Self contained wall, ceiling with optional wire suspended exit blade. Available in two sizes, achieving 25m and 30m viewing distances

Key features

- ✓ 3 Hour duration
- ✓ IP40
- ✓ Maintained or Non maintained operation
- ✓ Integral lithium iron phosphate (LifePO4) battery
- ✓ Fully compliant with EN60598.2.22
- ✓ DALI/ Self test option in accordance with BSEN62034
- ✓ 25m & 30m viewing distances
- ✓ Side and rear cable entry
- ✓ Supplied with EC & ISO format legends



☎ 0161 274 3626

✉ sales@hilclare.com

www.hilclare.com

Light Engine and Control Gear Options


- **Colour Temperature:** 4500K
- **Supply power:** 2.6W (small) & 3.1W (large)
- **Charge power:** 0.7W
- **Battery:** 3.6V 1.5Ah Nickel Cadmium (NiCd)
- **Supply voltage:** 230V 50Hz
- **Technology:** Manual test, DALI & Self test
- LED charge indicator

Materials and Environment

- **IP Rating:** IP20
- **IK Rating:**
- **Weight:** 2.5kg
- **Body:** White polycarbonate
- **Diffuser:** Screen printed polycarbonate legend panel
- **Operating temperature:** 0°C to 25°C

Installation Notes

- First fix plate installation
- Top and rear cable entry
- Fixing holes suitable for wall or ceiling mounting
- Parallel suspension wires with two locking clutch mechanism- suspended versions
- Adjustable suspension wires 15mm to 1m
- Recessed mounting accessory available

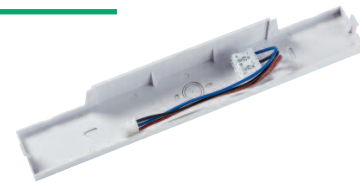

Universal first fix plate

Spacing Table




Specification

To specify state: Self contained 3 Hour emergency exit blade, polycarbonate body with flexible mounting solutions. Integral LifePO4 batteries and LED charge indicator. Capable of 25m (small) & 30m (large) viewing distances.

As per- Hilclare Lighting, MXE-25/30

Photometric

Dimensions

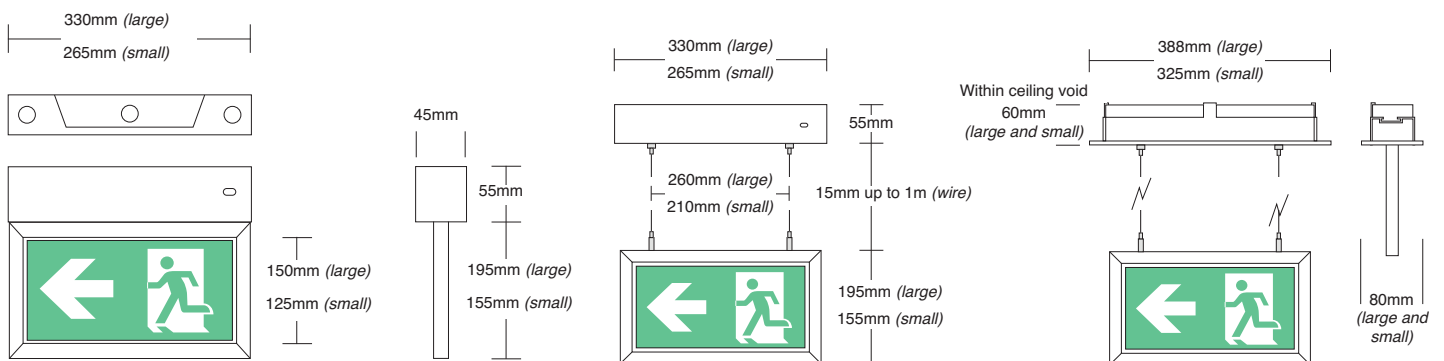

Product Number

Part No	Description
MXE253H	Ceiling or wall mounted exit blade, small 25m viewing distance.
MXE303H	Ceiling or wall mounted exit blade, large 30m viewing distance.
MXE253H/SW	Suspension wire mounted exit blade, small 25m viewing distance.
MXE303H/SW	Suspension wire mounted exit blade, large 30m viewing distance.

A pack of EC & ISO format legend screens supplied with each fitting

For DALI/Self Test option suffix 'DA' , e.g. MXE253H becomes MXE253HDA

For further information, contact our Customer Service Department on 0161 274 3626 or email sales@hilclare.com
Lm/cW = luminaire lumens per circuit watt.

Accessories

Part No	Description
MXE25/RECESSBRK	Recessing bracket for small 25m viewing distance
MXE30/RECESSBRK	Recessing bracket for large 30m viewing distance
MXE25/AU	MXE-25 ISO format 'Arrow Up' screen
MXE25/AL	MXE-25 ISO format 'Arrow Left' screen
MXE25/AR	MXE-25 ISO format 'Arrow Right Screen
MXE30/AU	MXE-30 ISO format 'Arrow Up' screen
MXE30/AL	MXE-30 ISO format 'Arrow Left' screen
MXE30/AR	MXE-30 ISO format 'Arrow Right Screen



Recessing bracket



Suspended version

