

Paleta

Adjustable



Downlights



A range of recessed LED adjustable downlight luminaires. Suitable for use in foyers, meeting rooms, corridors and other areas in commercial buildings and retail shops.

High efficacy - LOR > 85%

Emergency and self-test options

Dimming options including DALI integration

80° vertical tilt

Average life > 50,000 hours (L70)

HILCLARE

LIGHTING MANUFACTURER

— LED BY DESIGN —

T: 0161 274 3626

F: 0161 274 3731

E: sales@hilclare.com


Ordering Information

	Code	Weight (kg)	Total Watts	Total Lumens	Luminaire Efficacy	IP Rating	Life	Warranty
17W	PT1740HO8	1.5	17	1769	117	IP20	50,000hr	5 year
20W	PT2040HO8	1.5	20	1819	106	IP20	50,000hr	5 year
25W	PT2540HO8	1.5	25	2610	104	IP20	50,000hr	5 year
25W	PT2530HO8	1.5	25	2738	109	IP20	50,000hr	5 year
32W	PT3240HO8	1.5	32	3424	106	IP20	50,000hr	5 year
32W	PT3230HO8	1.5	32	3511	108	IP20	50,000hr	5 year


Code Builder

Dali/switch dimming – Add DA

Dimensions

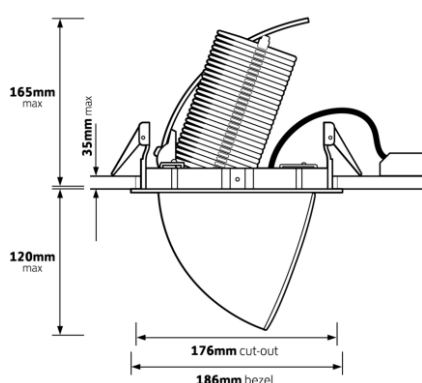

Photometrics

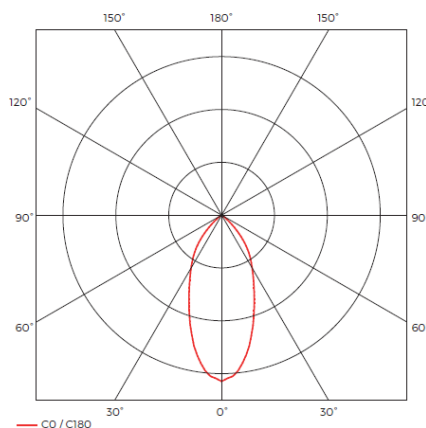

Classification of Protection

Against electric shock Class 1 protected with earthed metalwork. Against ingress of dust and moisture IP20 Technical Specification.

Specification

A range of recessed LED adjustable downlight luminaires. Suitable for use in foyers, meeting rooms, corridors and other areas in commercial buildings and retail shops.

Standards

The Paleta range of luminaires is designed and manufactured to meet the requirements of BSEN 60598 2-1.

Operations

Designed for operation in an interior environment. Ambient temperature range: 0°C to +25°C.
230V 50Hz nominal input voltage.