

NEW

HILCLARE

LIGHTING MANUFACTURER

— LED BY DESIGN —

XE-36

Surface Mounted Exit Sign



Surface mounted exit sign suitable for indoor wall mounted applications. Supplied complete with legend

Key features

- ✓ 3 Hour duration
- ✓ IP20
- ✓ Maintained or Non maintained operation
- ✓ Integral NiCd Batteries
- ✓ Fully compliant with EN60598.2.22
- ✓ DALI/ Self test option in accordance with BSEN62034
- ✓ Excellent 36m viewing distance
- ✓ Side and rear cable entry
- ✓ Supplied complete with fully compliant legend format



☎ 0161 274 3626

✉ sales@hilclare.com

www.hilclare.com

Light Engine and Control Gear Options

- **Colour Temperature:** 4500K
- **Supply power:** 3.0W
- **Charge power:** 1.7W
- **Battery:** 3.6V 1.5Ah Nichel Cadmium (NiCd)
- **Supply voltage:** 230V 50Hz
- **Technology:** Manual test, DALI & Self test
- LED charge indicator

Materials and Environment

- **IP Rating:** IP20
- **IK Rating:**
- **Weight:** 1.6kg
- **Body:** White epoxy coated steel body
- **Diffuser:** Screen printed polycarbonate legend panel
- **Operating temperature:** 0°C to 25°C

Installation Notes

- **Mounting:** Wall mounted installation via rear hole slots
- **Installation:** 20mm knock outs
- Integral gear tray

Spacing Table




Specification

To specify state: Self contained 3 Hour emergency exit sign, epoxy coated steel base suitable for wall mounting via rear slot holes. Intergral NiCd batteries and LED charge indicator. Capable of 36m viewing distances.

As per- Hilclare Lighting, XE-36

Photometric

Dimensions

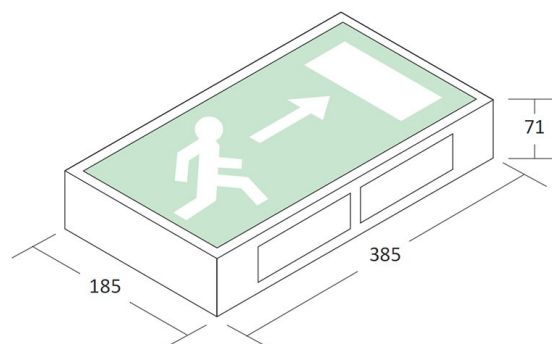

Product Number

Part No	Description
XE363H/AU	Surface mounted exit sign, complete with ISO format 'Arrow Up'
XE363H/AL	Surface mounted exit sign, complete with ISO format 'Arrow Left'
XE363H/AR	Surface mounted exit sign, complete with ISO format 'Arrow Right'

For DALI/Self Test option suffix 'DA' , e.g. XE363H becomes XE363HDA

For further information, contact our Customer Service Department on 0161 274 3626 or email sales@hilclare.com

Lm/cW = luminaire lumens per circuit watt.



0161 274 3626



sales@hilclare.com

www.hilclare.com